


## OVEK-1000Mx

### PCI Gigabit Ethernet NIC for UTP Standard Environment

#### ▪ Description

OPTOVALLEY's OVEK-1000M is designed for 10/100/1000Base-T Server/Client PCI Adapter and runs at 1000Mbps over CAT-3,4,5,6 cabling.

This Adapter is designed for optimize server & client with 33/66MHz clock rate, 32/64bit width PCI bus master capability performance in high-end server environment. In addition, this adapter's maximum transfer length is 100m under UTP standard environment.

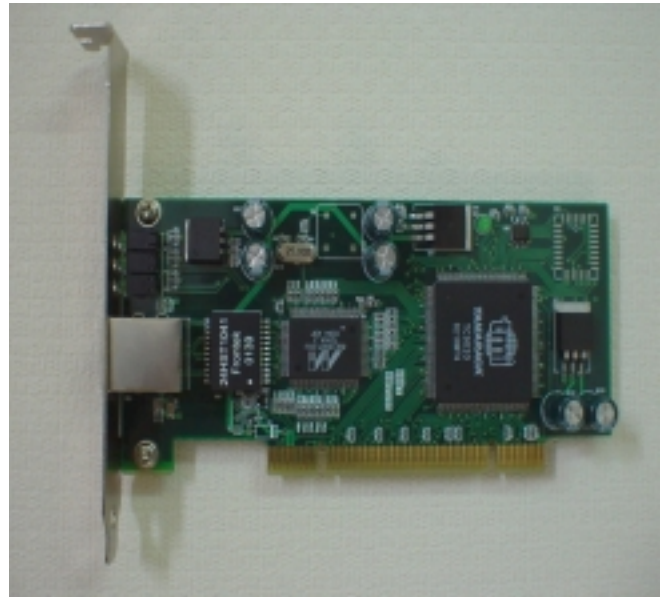

#### OPTOVALLEY's OVEK-1000M

- High performance, Cost effective network adapter for 1000 -T Server & client PCI

#### Features

- Standard : 1000 BASE-T ( IEEE 802.3z )
- Maximum Transfer Speed : 1000 Mbps
- Plug'n Play, Full-duplex capable
- OS driver support :
  - MS WIN 95/98/ME/SE/2000 NT/4.0
  - Novell Netware 4.X/5.X, Linux(2.2X,2.3X,2.4X)
- PCI V 2.2 compliant
- CAT-3,4,5,6cabling support
- **Model x-3:32bit / x-6:64bit**

#### Applications

- Ethernet server
- Data Communication Network